


ABREX[®]-E



Specifications

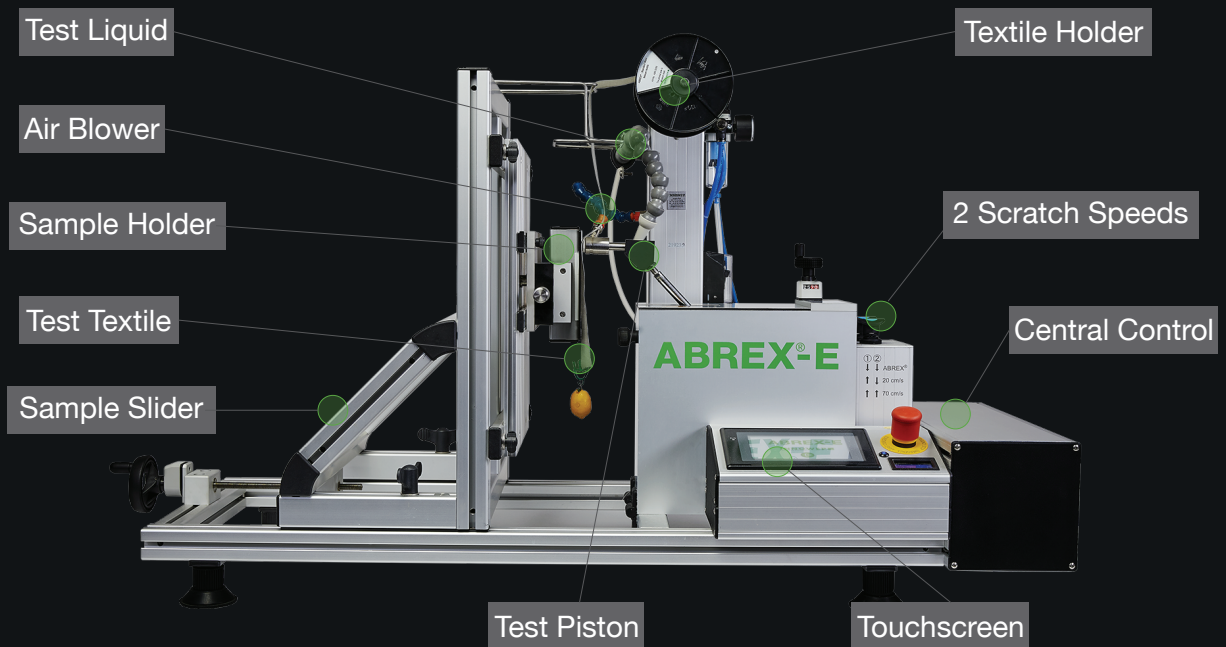

Technical Data

Load: 1-20N

Speed: 60mm/s; 20cm/s & 70cm/s for scratch tests

Friction path: 4 – 40mm

Liquid supply: cyclic & manual

Fabric supply: cyclic & manual

Number of cycles: 1 -100 million

Electricity: 230 V/50 Hz CE-conform or 110V/60 Hz

Net weight: 53kg

Dimension: W 130, H 80, D 60 cm